

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”


IS 12361 (1988): Partially Hydrogenated Rice Bran Fatty Acids [FAD 13: Oils and Oilseeds]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”

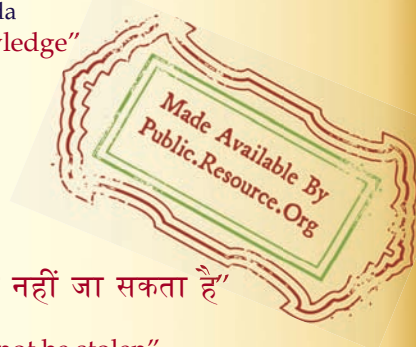

“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



Indian Standard

**SPECIFICATION FOR PARTIALLY
HYDROGENATED RICE BRAN FATTY ACIDS**

UDC 665.333.5

© Copyright 1988

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

Indian Standard

SPECIFICATION FOR PARTIALLY HYDROGENATED RICE BRAN FATTY ACIDS

0. FOREWORD

0.1 This Indian Standard was adopted by the Bureau of Indian Standards on 29 April 1988, after the draft finalized by the Oils and Oilseeds Sectional Committee had been approved by the Chemical Division Council and the Agricultural and Food Products Division Council.

0.2 Rice bran oil is obtained from rice bran by solvent extraction. Hydrogenated rice bran fatty acid is obtained by splitting, distillation and hydrogenation of rice bran oil or by hydrogenation of distilled fatty acids obtained by splitting of rice bran oil or by hydrogenation of the rice bran oil followed by splitting and distillation.

0.3 Rice bran fatty acids contain 20-25 percent of saturated and 75-80 percent of unsaturated fatty acids. The main unsaturated fatty acids are oleic (40-50 percent) and linoleic (28-42 percent). The soap obtained from rice bran fatty

acids is quite soft due to high percentage of unsaturated fatty acid content. For this reason, it is not possible to use high percentage of rice bran fatty acids in soap. However, if rice bran fatty acids are partially hydrogenated to reduce the unsaturated fatty acids, they can be used in large proportions in the soap. Partially hydrogenated fatty acids resemble Mowrah fatty acids which are ideal for soap making.

0.4 For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the result of a test or analysis, shall be rounded off in accordance with IS : 2-1960*. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

*Rules for rounding off numerical values (revised).

1. SCOPE

1.1 This standard prescribes the requirements, and methods of sampling and test for partially hydrogenated rice bran fatty acids.

2. REQUIREMENTS

2.1 Description — The material shall be obtained by splitting, distillation and hydrogenation; or splitting, hydrogenation and distillation; or hydrogenation, splitting and distillation of rice bran oil.

2.2 The material shall be free from adulterants, sediment, suspended and other foreign matter and separated water. It shall be clear on melting.

2.3 The material shall also comply with the requirements given in Table 1 when tested in accordance with the methods referred to in col 4 and 5 of the table.

3. PACKING AND MARKING

3.1 Packing — The material shall be supplied in suitable containers as agreed to between the purchaser and the supplier. The packing in mild steel drums shall be avoided.

3.2 Marking — The containers shall be securely closed and legibly and indelibly marked with the

following information:

- a) Manufacturer's name and trade-mark, if any;
- b) Name of the material;
- c) Net mass of the material;
- d) Batch or lot number, in code or otherwise; and
- e) Month and year of manufacture.

3.2.1 The material may also be marked with the Standard Mark.

NOTE — The use of the Standard Mark is governed by the provisions of the Bureau of Indian Standards Act, 1986 and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well-defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers, may be obtained from the Bureau of Indian Standards.

4. TESTS

4.1 Tests shall be carried out by the methods prescribed in col 4 and 5 of Table 1.

TABLE 1 REQUIREMENTS FOR PARTIALLY HYDROGENATED RICE BRAN FATTY ACIDS
(*Clauses 2.3 and 4.1*)

Sl No.	CHARACTERISTIC	REQUIREMENTS	METHOD OF TEST, REF TO	
			Appendix	Cl No. in IS : 548 (Part 1)-1964*
(1)	(2)	(3)	(4)	(5)
i)	Moisture, percent by mass, <i>Max</i>	0.1	—	5.2
ii)	Saponification value	198-206	—	15
iii)	Acid value shall not differ from saponification value by more than	6	—	7
iv)	Iodine value, <i>Max</i>	70	—	14
v)	Mineral acidity	Nil	A-1	—
vi)	Ash, percent by mass, <i>Max</i>	0.2	A-2	—
vii)	Unsaponifiable matter, percent by mass, <i>Max</i>	1.0	—	8
viii)	Titre, °C, <i>Min</i>	42	—	12
ix)	Colour in a 1-in cell on the Lovibond scale expressed as <i>Y + 5R</i> , not deeper than	30	—	13

*Methods of sampling and test for oils and fats: Part 1 Sampling, physical and chemical tests (*revised*).

5. SAMPLING

5.1 The representative samples of the material shall be drawn and conformity of the material to

the requirements of this specification shall be determined according to the procedure given in Appendix B.

APPENDIX A

[*Table 1, Items (v) and (vi)*]

TEST FOR MINERAL ACIDITY AND ASH

A-1. TEST FOR MINERAL ACIDITY

A-1.1 Quality of Reagents — Unless specified otherwise, pure chemicals and distilled water (*see* IS : 1070-1977*) shall be employed in tests.

NOTE — 'Pure chemicals' shall mean chemicals that do not contain impurities which affect the results of analysis.

A-1.2 Reagents

A-1.2.1 Methyl Orange Indicator — 0.05 per cent (*m/v*) solution.

A-1.2.2 Light Petroleum Ether — (60°C/80°C).

A-1.3 Procedure — Measure 10 ml of the melted sample into a separating funnel and shake intimately with three successive 10 ml portions of hot water. The temperature of the hot water should be more than the melting point of rice bran fatty acids. Combine the aqueous extracts, transfer to another separating funnel and remove

traces of fatty acids in the water by extraction with light petroleum ether. Test the aqueous extract so obtained with a few drops of methyl orange indicator.

A-1.4 The material shall be taken to have satisfied the requirements of the test if the indicator does not show acid reaction.

A-2. DETERMINATION OF ASH

A-2.1 Apparatus

A-2.1.1 Platinum Crucible

A-2.1.2 Desiccator — Containing an efficient desiccant such as fused calcium chloride.

A-2.2 Procedure — Weigh accurately about 10 g of the air-dried material into a platinum crucible which has been previously dried, cooled in the desiccator and weighed. Heat the crucible over a low flame and ignite the contents gently. Incinerate the residue in a muffle furnace at $550 \pm 10^\circ\text{C}$ until free from carbon. Cool the crucible in a desiccator and weigh. Repeat the above procedure of heating, cooling and weighing

*Specification for water for general laboratory use (*second revision*).

until the difference between two successive weighings does not exceed 1 mg.

A-2.3 Calculation

$$\text{Ash, percent by mass} = \frac{100 m}{M}$$

where

m = mass in g of the ash, and

M = mass in g of the material taken for the test.

APPENDIX B

(Clause 5.1)

SAMPLING OF PARTIALLY HYDROGENATED RICE BRAN FATTY ACIDS

B-1. GENERAL REQUIREMENTS OF SAMPLING

B-1.0 In drawing, preparing, storing and handling test samples, the following precautions and directions shall be observed.

B-1.1 Samples shall not be taken in an exposed place.

B-1.2 The sampling instrument shall be clean and dry when used.

B-1.3 Precautions shall be taken to protect the samples, the material being sampled, the sampling instrument and the containers for samples from adventitious contamination.

B-1.4 To draw a representative sample, the contents of each container selected for sampling shall be mixed as thoroughly as possible by suitable means.

B-1.5 The samples shall be placed in clean, dry glass stoppered bottles.

B-1.6 The sample containers shall be of such a size that they are almost completely filled by the sample.

B-1.7 Each sample container shall be sealed airtight after filling and marked with full details of sampling, the date of sampling, and the year and month of manufacture of the material.

B-1.8 Samples shall be stored in such a manner that the temperature of the material does not vary unduly from the normal temperature.

B-2. SCALE OF SAMPLING

B-2.0 Samples to determine conformity of the material to this specification shall be selected in accordance with the procedure given below. However, the purchaser and the supplier may agree to adopt any other procedure.

B-2.1 Lot — All the containers in a single consignment of the material drawn from a single batch of manufacture shall constitute the lot. If a consignment is declared to consist of different batches of manufacture, the batches shall be marked separately and the groups of containers in

each batch shall constitute separate lots.

B-2.2 The number of containers to be selected from a lot shall depend upon the size of the lot and shall be in accordance with col 1 and 2 of Table 2.

TABLE 2 NUMBER OF CONTAINERS TO BE SELECTED FROM VARIOUS SIZES OF LOTS

LOT SIZE	NUMBER OF CONTAINERS TO BE SELECTED
N	n
(1)	(2)
Up to 5	All (See Note)
6 to 65	5
66 to 110	7
Over 110	10

NOTE — When the lot size is 5 or less, the test results of each of the samples shall meet the corresponding requirements.

B-2.3 These containers shall be selected at random from the lot. In order to ensure the randomness of selection, procedures given in IS : 4905-1968* may be followed.

B-3. TEST SAMPLES AND REFEREE SAMPLE

B-3.1 Draw with an appropriate sampling instrument small portions of the material from different parts of the selected containers, the total quantity being sufficient to carry out the tests for all characteristics given in Table 1.

B-3.2 Mix thoroughly all portions of the material drawn from the same container to form an individual sample to represent the container. Equal quantities from the selected containers shall be mixed together to form a composite sample to represent the lot.

B-3.3 All the individual samples representing the selected containers and the composite sample representing the lot shall be divided into three equal parts, thus forming three sets of test samples. These parts shall be immediately

*Methods for random sampling.

transferred to thoroughly dried bottles which shall then be sealed air-tight with glass stoppers. These shall be labelled with all the particulars of sampling given in **B-1.7**. One set of the test samples shall be sent to the purchaser and one to the supplier.

B-3.4 Referee Sample — The third set of the test samples, bearing the seals of the purchaser and the supplier, shall constitute the referee sample and shall be used in case of dispute between the purchaser and the supplier. It shall be kept at a place agreed to between the purchaser and the supplier.

B-4. NUMBER OF TESTS

B-4.1 The tests for saponification value, acid value and titre (*see* Table 1) shall be carried out on each individual sample of the set of test samples (*see* **B-3.3**).

B-4.2 The tests for the remaining characteristics given in Table 1 shall be carried out on the composite sample of the set of test samples (*see* **B-3.3**).

B-5. CRITERION FOR CONFORMITY

B-5.1 A lot shall be considered as conforming to this specification if it satisfies the criteria in **B-5.2.1** and **B-5.3** for the characteristics given in Table 1.

B-5.2 The test results for saponification value, acid value and the titre shall be recorded as shown in Table 3. The mean and the range shall be calculated as follows and shall be recorded in col 4 and 5 of Table 3.

$$\text{Mean } (\bar{X}) = \frac{\text{Sum of the test results}}{\text{Number of test results}}$$

$$\text{Range } (R) = \text{Difference between the maximum and the minimum values of the test results}$$

B-5.2.1 The corrected mean as shown in col 6 of Table 3 shall be calculated. The lot shall be considered to have satisfied the requirement for a characteristic if the condition given in col 7 of Table 3 is satisfied.

B-5.3 The composite sample, when tested for the remaining characteristics not tested in **B-5.2**, shall satisfy the corresponding requirements for them as specified in Table 1.

TABLE 3 CRITERION FOR CONFORMITY
(*Clauses B-5.2 and B-5.2.1*)

Sl. No.	CHARACTERISTIC	TEST RESULTS 1, 2, 3...	MEAN	RANGE	CORRECTED MEAN	CRITERION FOR CONFORMITY
(1)	(2)	(3)	(4)	(5)	(6)	(7)
i)	Saponification value		\bar{X}_1	R_1	$\bar{X}_1 - 0.6 R_1$	Corrected mean \geq specified value in Table 1 (ii)
ii)	Acid value		\bar{X}_2	R_2	$\bar{X}_2 - 0.6 R_2$	Corrected mean \geq specified value in Table 1 (iii)
iii)	Titre		\bar{X}_3	R_3	$\bar{X}_3 - 0.6 R_3$	Corrected mean \leq specified value in Table 1 (viii)

BUREAU OF INDIAN STANDARDS

Headquarters:

Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002

Telephones: 3310131, 3311375

Telegrams : Manaksanstha
(Common to all offices)

Regional Offices:

	Telephone
Central: Manak Bhavan, 9 Bahadur Shah Zafar Marg, NEW DELHI 110002	3310131, 3311375
*Eastern: 1/14 C.I.T. Scheme VII M, V.I.P. Road, Maniktola, CALCUTTA 700054	362499
Northern: SCO 445-446, Sector 35-C, CHANDIGARH 160036	21843, 31641
Southern: C.I.T. Campus, MADRAS 600113	412442, 412519, 412916
†Western: Manakalaya, E9 MIDC, Marol, Andheri (East), BOMBAY 400093	6329295

Branch Offices:

'Pushpak' Nurmohamed Shaikh Marg, Khanpur, AHMADABAD 380001	26348, 26349
Peenya Industrial Area, 1st Stage, Bangalore-Tumkur Road, BANGALORE 560058	384955, 384956
Gangotri Complex, 5th Floor, Bhadbhada Road, T.T. Nagar, BHOPAL 462003	66716
Plot No. 82/83, Lewis Road, BHUBANESHWAR 751002	53627
53/5 Ward No. 29, R.G. Barua Road, 5th By-lane, GUWAHATI 781003	—
5-8-56C L. N. Gupta Marg (Nampally Station Road), HYDERABAD 500001	231083
R14 Yudhister Marg, C Scheme, JAIPUR 302005	63471, 69832
117/418 B Sarvodaya Nagar, KANPUR 208005	216876, 218292
Patliputra Industrial Estate, PATNA 800013	62305
T.C. No. 14/1421, University P.O. Palayam, TRIVANDRUM 695035	62104, 62117

Inspection Offices (With Sale Point):

Pushpanjali, First Floor, 205A West High Court Road, Shankar Nagar Square, NAGPUR 440010	25171
Institution of Engineers (India) Building, 1332 Shivaji Nagar, PUNE 411005	52435

*Sales Office in Calcutta is at 5 Chowringhee Approach, P. O. Princep Street, Calcutta 700072 276800
†Sales Office in Bombay is at Novelty Chambers, Grant Road, Bombay 400097 896528